

#3  
09/922/463

**REGISTRY OF PATENTS  
SINGAPORE**


This is to certify that the annexed is a true copy of the following Singapore patent application as filed in this Registry.

Date of Filing : 28 FEBRUARY 2001

Application Number : 200101252-5

Applicant(s) : HEWLETT-PACKARD COMPANY

Title of Invention : METHOD AND APPARATUS FOR  
SUPPLYING NETWORK PATH BOOKMARK  
INFORMATION REMOTELY TO A MOBILE  
DEVICE

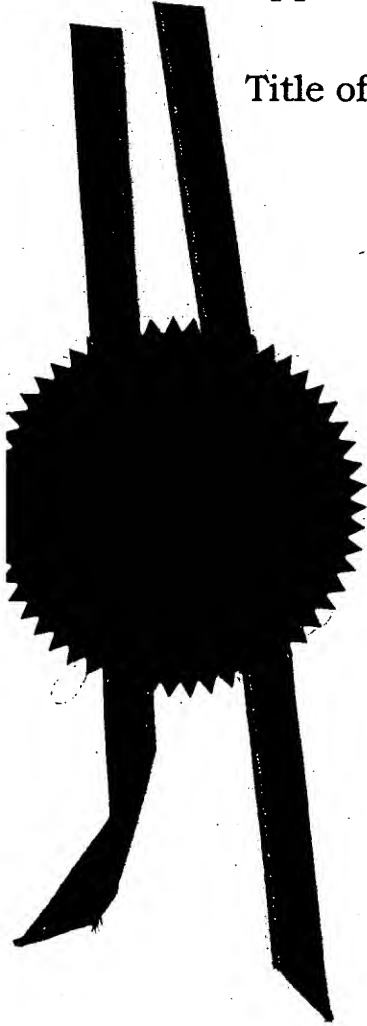

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

  
CHIG KAM TACK  
Assistant Registrar  
for REGISTRAR OF PATENTS  
SINGAPORE

**SINGAPORE  
PATENTS ACT  
(CHAPTER 221)  
PATENTS RULES**


**200101252-5  
28 FEB 2001**

*The Registrar of Patents  
Registry of Patents*

**REQUEST FOR THE GRANT OF A PATENT**  
**THE GRANT OF A PATENT IS REQUESTED BY THE UNDERSIGNED ON THE BASIS OF THE PRESENT APPLICATION**

<b>I. Title of Invention</b>	Method And Apparatus For Supplying Network Path Bookmark Information Remotely To A Mobile Device	
<b>II. Applicant(s)</b> (See note 2)	<b>(a) Name</b>	Hewlett-Packard Company
	<b>Body Description/ Residency</b>	A company incorporated under the laws of the State of Delaware, United States of America
	<b>Street Name &amp; Number</b>	3000 Hanover Street
	<b>City</b>	Palo Alto
	<b>State</b>	California 94304
	<b>Country</b>	United States of America
	<b>(b) Name</b>	
	<b>Body Description/ Residency</b>	
	<b>Street Name &amp; Number</b>	
	<b>City</b>	
	<b>State</b>	
	<b>Country</b>	
	<b>(c) Name</b>	
	<b>Body Description/ Residency</b>	
	<b>Street Name &amp; Number</b>	
	<b>City</b>	
	<b>State</b>	
	<b>Country</b>	

III. Declaration of Priority (see note 3)	Country/Country Designated		File no.									
	Filing Date											
	Country/Country Designated		File no.									
	Filing Date											
	Country/Country Designated		File no.									
	Filing Date											
IV. Inventors (See note 4)												
(a) The applicant(s) is/are the sole/joint inventor(s).		<table border="1"> <tr> <td><input type="checkbox"/></td> <td>Yes</td> <td><input checked="" type="checkbox"/></td> <td>No</td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td>Yes</td> <td><input type="checkbox"/></td> <td>No</td> </tr> </table>			<input type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	No	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No
<input type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	No									
<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No									
(b) A statement on Patents Form 8 is furnished.												
V. Name of Agent (if any) (See note 5)		Intellectual Property, Asia Pacific / Legal Department Hewlett-Packard Far East Pte Ltd										
VI. Address for Service (See note 6)	Block/Hse No		Level No	2nd								
	Unit No/PO Box	02-12	Postal Code	119967								
	Street Name	438A Alexandra Road										
	Building Name	Alexandra Technopark										
VII. Claiming an earlier filing date under section 20(3), 26(6) or 47(4). (See note 7)	Application No											
	Filing Date											
	[Please tick in the relevant space provided]:  ( ) Proceeding under rule 27(1)(a). Date on which the earlier application was amended = _____ or ( ) Proceeding under rule 27(1)(b).											

VIII. Invention has been displayed at an International Exhibition (See note 8)		<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
IX. Section 114 requirements (See note 9)		The invention relates to and/or used a micro-organism deposited for the purposes of disclosure in accordance with section 114 with a depository authority under the Budapest Treaty. <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
X. Check List (To be filled in by applicant or agent)	A. The application contains the following number of sheet(s):-		
	1. Request	4	sheets
	2. Description	16	sheets
	3. Claim(s).	6	sheets
	4. Drawing(s).	3	sheets
	5. Abstract.	1	sheets
	B. The application as filed is accompanied by:-		
	1. Priority document	<input type="checkbox"/>	
	2. Translation of priority document	<input type="checkbox"/>	
	3. Statement of Inventorship & right to grant	X	
	4. International Exhibition Certificate	<input type="checkbox"/>	
XI. Signature(s) (See note 10)	Applicant (a)	 Hewlett-Packard Far East Pte Ltd	
	Date	28 February 2001	
	Applicant (b)		
	Date		
	Applicant (c)		
	Date		

**NOTES:**

1. This form when completed, should be brought or sent to the Registry of Patents together with the prescribed fee and 3 copies of the description of the invention, and of any drawings.
2. Enter the name and address of each applicant in the spaces provided at paragraph II. Names of individuals should be indicated in full and the surname or family name should be underlined. The names of all partners in a firm must be given in full. The place of residence of each individual should also be furnished in the space provided. Bodies corporate should be designated by their corporate name and country of incorporation and, where appropriate, the state of incorporation within that country should be entered where provided. Where more than 3 applicants are to be named, the names and address of the fourth and any further applicants should be given on a separate sheet attached to this form together with the signature of each of these further applicants.
3. The declaration of priority at paragraph III should state the date of the previous filing, the country in which it was made, and indicate the file number, if available. Where the application relied upon in an International Application or a regional patent application e.g. European patent application, one of the countries designated in that application [being one falling under the Patents (Convention Countries) Order] should be identified and the name of that country should be entered in the space provided.
4. Where the applicant or applicants is/are the sole inventor or the joint inventors, paragraph IV should be completed by marking the 'YES' Box in the declaration (a) and the 'NO' Box in the alternative statement (b). Where this is not the case, the 'NO' Box in declaration (a) should be marked and a statement will be required to be filed on Patents Form 8.
5. If the applicant has appointed an agent to act on his behalf, the agent's name should be indicated in the spaces available at paragraph V.
6. An address for service in Singapore to which all documents may be sent must be stated at paragraph VI. It is recommended that a telephone number be provided if an agent is not appointed.
7. When an application is made by virtue of section 20(3), 26(6) or 47(4), the appropriate section should be identified at paragraph VII and the number of the earlier application or any patent granted thereon identified. Applicants proceeding under section 26(6) should identify which provision in rule 27 they are proceeding under. If the applicants are proceeding under rule 27(1)(a), they should also indicate the date on which the earlier application was amended.
8. Where the applicant wishes an earlier disclosure of the invention by him at an International Exhibition to be disregarded in accordance with section 14(4)(c), then the 'YES' Box at paragraph VIII should be marked. Otherwise the 'NO' Box should be marked.
9. Where in disclosing the invention the application refers to one or more micro-organisms deposited with a depository authority under the Budapest Treaty, then the 'YES' Box at paragraph IX should be marked. Otherwise the 'NO' Box should be marked.
10. Attention is drawn to rules 90 and 105 of the Patent Rules. Where there are more than 3 applicants, see also Note 2 above.
11. Applicants resident in Singapore are reminded that if the Registry of Patents considers that an application contains information the publication of which might be prejudicial to the defence of Singapore or the safety of the public, it may prohibit or restrict its publication or communication. Any person resident in Singapore and wishing to apply for patent protection in other countries must first obtain permission from the Singapore Registry of Patents unless they have already applied for a patent for the same invention in Singapore. In the latter case, no application should be made overseas until at least 2 months after the application has been filed in Singapore.

**For Official Use**

Application Filing Date:        /        /

Request received on        :        /        /

Fee received on        :        /        /

Amount        :

\*Cash/Cheque/Money Order No:

*\*Delete whichever is inapplicable*

**METHOD AND APPARATUS FOR SUPPLYING NETWORK PATH  
BOOKMARK INFORMATION REMOTELY TO A MOBILE DEVICE**

5 **BACKGROUND OF THE INVENTION**

This invention relates to a method and an apparatus for supplying remotely stored network path bookmark information to a mobile device.

10 In recent years, the popularity of the internet and coupled with this, the popularity of internet web browser programs have increased immensely. Furthermore, there has been a huge growth of offered services and homepages in the internet, each being linked to a unique internet address, usually called URL.

15

In order to make the usage of the internet more convenient, so called favourites or bookmarks, in the following also denoted as network path bookmark information, have been implemented as a mechanism in a browser program. The network path bookmark information in this context is a unique internet  
20 address, which is stored within the internet browser program in such a way that a user may select this presented network path bookmark information without needing to type in the entire internet address of the desired homepage.

This provides an easy facility to reuse, generally remember, frequently used  
25 homepages and with this, frequently used web services.

However, it is a common problem faced by a lot of users working on multiple personal computers to port these network path bookmark information or synchronize the network path bookmark information between the computers  
30 used.

Thus, it is necessary for most of the users to carry the network path bookmark information in a portable storage. Besides, there has not been provided a mechanism to access the network path bookmark information stored on a desk top computer from a mobile device like a mobile phone or a lap top or a personal digital assistant (PDA).

### SUMMARY OF THE INVENTION

Therefore, it is an object of the invention to provide a mechanism for supplying network path bookmark information which is stored in a client computer, for example a desk top computer to a mobile device.

The object is achieved by a method and apparatus for supplying network path bookmark information to a mobile device with the features according to the independent claims.

According to a first aspect of the invention, a method for supplying at least one network path bookmark information to a mobile device, the network path bookmark information being stored in a client computer, comprises the following steps:

- a) the client computer determines the network path bookmark information from a predetermined directory in the client computer,
- b) the client computer transmits the network path bookmark information to a server computer via a first communication network,
- c) the mobile device, which is connected to the server computer via a second communication network, requests the at least one network path bookmark information, and
- d) the server computer transmits the requested network path bookmark information to the mobile device.

According to a second aspect of the invention, a method for supplying remotely stored information to an appliance via a mobile device, the appliance being connected to a first computer system, comprises the following steps:

- determining at least one network path bookmark information designating a remotely stored information to be processed, wherein the determination of the network path bookmark information comprises the following steps:
  - a) the client computer determines the network path bookmark information from a predetermined directory in the client computer,
  - b) the client computer transmits the network path bookmark information to a server computer via a first communication network,
  - c) the mobile device, which is connected to the server computer via a second communication network, requests the at least one network path bookmark information, and
  - d) the server computer transmits the requested network path bookmark information to the mobile device,
- designating the determined network path bookmark information of the remotely stored information to be processed and the appliance to which the information, which is connected to the network path bookmark information, is to be applied as instructions in the mobile device,
- transmitting the instructions from the mobile device to the first computer system via a first communication network,
- retrieving the information and converting the information to a format suitable for the appliance, and
- supplying the information to the appliance for processing according to the instructions.

In this context, the information may be understood as a piece of textual information being addressable, i.e. linked, using the network path bookmark information, e.g. a web-based piece of information, e.g. a web site, i.e. an internet page, which is encoded according to the HTML format or according to the WML format. In other words, the information may be considered as being the content of an internet page being addressed by a bookmark, e.g. a URL.



According to a third aspect of the invention, a computer system which allows a user of a mobile device to retrieve at least one network path bookmark information, the network path bookmark information being stored in a client computer, comprises:

- a client computer having stored at least one network path bookmark information being stored in a predetermined directory in the client computer, and comprising means for determining the requested network path bookmark information from the predetermined directory,
- a server computer being connected to the client computer via a first communication network, the server computer being adapted to receive the extracted network path bookmark information from the client computer,
- the mobile device, being connected to the server computer via a second communication network and being adapted to request network path bookmark information from the server computer.

The invention provides a very simple and thus cheap way for automatically providing network path bookmark information to a mobile device.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates one preferred embodiment of the invention.

Figure 2 illustrates the exchange of bookmarks according to the preferred embodiment of the invention.

Figure 3 illustrates the exchange of bookmarks according to the preferred embodiment of the invention in more detail.

## DETAILED DESCRIPTION OF THE INVENTION

In one preferred embodiment of the invention as shown in **Figure 1**, a user of a mobile device 100 such as a mobile phone can print documents stored in his personal computer 102 or any other computer being connected to the internet 108 via a printer 104.

In other words, the user of a mobile device such as a mobile phone can print documents stored in any computer being connected to the Internet and being freely accessible by the user via the internet.

In this context, the document is a piece of textual information being addressable, i.e. linked, using the network path bookmark information, i.e. a web-based piece of information, e.g. a web site, i.e. an internet page, which is encoded according to the HTML format or according to the WML format. In other words, the document is the an internet page being addressed by a bookmark, e.g. a URL.

Generally, the user of a mobile device 100 can print documents stored in any computer connected to the internet and being accessible to the mobile device 100 using the HTTP protocol.

To enable the user to access the document remotely, the mobile device 100 first determines the unique internet address (URL) which is assigned to the document which is to be printed.

In other words, the mobile device 100, in a first step, determines the internet address of the document he wants to print. According to this preferred embodiment of the invention, the mobile device 100 determines recently used network path bookmark information, i.e. favourites or bookmarks of web based browser programs for addressing the documents to be printed.

As shown in **Figure 2**, the user's personal computer 102 has installed a browser program 201 and together with the browser program 201, a list 202 of bookmarks being stored in a memory device (not shown) of the personal computer 102.

5

The list 202 of bookmarks comprises a plurality of URLs of internet pages offered via the internet, which have recently been selected by the user of the browser program 201 for being a favourite for the user.

10 According to this preferred embodiment of the invention, the personal computer 102 runs on the operating system WindowsNT<sup>TM</sup> 4.0. As a browser program 201, preferably an internet browser program (World Wide Web browser program, WWW browser program), e.g. the Netscape<sup>TM</sup> Communicator<sup>TM</sup> browser program or the Internet Explorer<sup>TM</sup>, is used.

15

In these embodiments, usually the list of bookmarks is stored under a predefined directory, using the Internet Explorer<sup>TM</sup>, the directory

**C:\winnt\Profiles\Name\_of\_User\Favorites\,**

20

for example, wherein the parameter "Name\_of\_User" usually denotes the name of the respective user of the browser program.

It should be noted that this directory designation is a usual default directory for  
25 storing bookmarks. However, any other directory for storing the respective bookmarks may be defined and used.

The personal computer 102 extracts the list 202 of bookmarks from the browser program repeatedly in a predefined time interval and transmits the list 202 to  
30 the central server computer 106 via the internet 108 and the first firewall 110

using a first bookmark message 203. The detailed architecture of the computer system will be described later in more detail with respect to **Fig.3**.

Alternatively, the list 202 may be provided to the central server computer 106 in answer to a request message sent by the central server computer 106 to the personal computer 102.

After having received the first bookmark message 203, the central server computer 106 stores the bookmarks in a central bookmark list 204 in its memory device. Alternatively, an already existing central bookmark list 204 may be updated according to a received list 202 from one or a plurality of personal computers 102.

In other words, after having received the lists 202 of bookmarks, via the central bookmark list 204 stored, the central server computer 106 has now access to all the bookmarks which are stored on the personal computers 102 being connected to the server computer 106 and which provide the central server computer 106 with their bookmarks.

When the mobile device 100 wants to print a document, the mobile device 100 connects to the central server computer 106 and transmits a request message 205 to the central server computer 106, therewith requesting the central bookmark list 204 or at least a part of the central bookmark list 204.

In answer to the request message 205, the central server computer 106 extracts the desired bookmarks requested in the request message 205 from the central bookmark list 204, forms an answer message 206 and transmits the answer message 206 to the mobile device 100.

After having received the bookmark message 206, the mobile device 100 now has access to the requested bookmarks 301 and thus can select a bookmark,

i.e. an internet address of the document the user of the mobile device 100 wants to be printed.

In the following, the system architecture and the detailed process for printing  
5 the desired document being identified using the bookmark, will be illustrated.

While the user selects the bookmarks, a string of information is packed into an HTTP packet in an illustrative format shown below, thereby forming the first bookmark message 203:

- 10       - HTTP header
- /MapleWML/CMServer/AddBookmarkFile.asp
- Username
- User Password (for the purpose of security)
- Bookmark name
- 15       - Bookmark address
- HTTP Trailer.

The parameter "Bookmark name" includes the name of the respective bookmark. The parameter "Bookmark address" includes the selected network  
20 path bookmark information and identifies and is associated with the actual location of the individual document. By selecting such a bookmark (to be discussed later), the central server computer 106 is able to identify the document to be printed.

25 Such an HTTP packet then will be sent to the central server computer 106 via the internet 108 as the first bookmark message 203.

In this embodiment, upon receiving it, the central server computer 106 is activated by the parameter "/MapleWML/CMServer/AddBookmarkFile.asp" to  
30 run a script. Thus the information following this parameter, i.e., the Username, User password, Bookmark name, Bookmark address, will be added to a bookmark database 204 (not shown) of the central server computer 106. The

bookmark database 204 stores the bookmark names 302 as well as the bookmark address 303, i.e. the URL, in other words the location of the document to be printed.

5 Furthermore, the personal computer 102 needs to be publicly accessible, that is, in a public domain so that by using its Username and User Password, other computers or servers can access and retrieve the respective web pages as documents from it.

10 Additionally, a plurality of appliances, including, for example, the printer 118, a fax machine 120, and a projector 122, are connected to an appliance server 116 and are registered in the central server computer 106. As a result, the central server computer 106 knows which appliances are login and where they are through the Appliance Identities (IDs) of the individual appliances and  
15 appliance server Internet Protocol (IP) address. Similarly, the appliances get registered by the appliance server 116 which is sending the central server computer 106, for example, an HTTP packet in the following illustrative format:

- HTTP header
- /MapleWML/CMServer/ApplianceLogin.asp
- 20 - Appliance ID
- Password for the Appliance Server
- Appliance Server IP Address
- HTTP Trailer,

where the parameter "/MapleWML/CMServer/ApplianceLogin.asp" activates the  
25 central server computer 106 to run a script such that the information following this parameter in the packet will be loaded to an appliance database (not shown) of the central server computer 106. The parameter "Appliance ID," for example, the appliance name, identifies the appliance to be registered. The parameter "Appliance Server IP Address" helps the central server computer  
30 106 to locate the appliance server 116, and further to know where the appliances are.

When the user is away from his computer 110 and wants a printed copy of a document being uniquely identified by the URL of the bookmark, the user may use his mobile phone 100 to request the central server computer 106 for the centrally stored bookmarks. The request message 205 reaches the central server computer 106 via a **Public Switched Telephone Network (PSTN)** 104, a gateway 102 and the internet 108. For communication between the mobile device 100 and the gateway 102, standard telecommunication protocols such as **Wireless Application Protocols (WAP)** are used. It is understood that WAP is used as a transport layer protocol based on the transport layer GSM. Higher data rate transport layers such as 3G can also be used. In the context of WAP, the mobile phone is WAP-enabled, and the request from the mobile device 100 is in the following illustrative format:

- WAP Header
- Username
- 15 - User Password
- WAP Trailer.

The gateway 102 converts the request, as well as instructions (as discussed below), to an HTTP format suitable for transfer through the internet 108. Subsequently, the gateway 102 passes the request to the central server computer 106.

It is noted that the mobile device 100 needs to install settings for identifying the gateway 102 and the central server computer 106 in advance. The mobile device 100 will then be able to contact the appropriate central server computer 106 via the appropriate gateway 102. Such a technology is well known in the field of wireless communication.

After receiving the request, the central server computer 106 packs a reply, i.e. the answer message 206 in the following illustrative HTTP format:

- HTTP Header

- bookmark name
- HTTP Trailer,

where the bookmark name includes the name of the bookmark which is assigned to the bookmark address 302, i.e. the actual URL, of all the documents which are freely accessible for the respective user of the mobile device 100. The central server computer 106 further sends its reply through the established connection towards the gateway 102, which in turn would convert the reply into a WAP format for displaying on the mobile device 100.

10

The user selects a document to be printed by selecting a bookmark (the bookmark name and/or the bookmark address) pointing to the desired document and a printer to which the document is to be printed via the mobile device 100. Such a selection is incorporated into an instruction, a printing instruction in the case of this embodiment, by the mobile device 100 according to the following illustrative format:

15

- WAP Header
- Username
- User Password
- Bookmark name
- Appliance ID
- WAP Trailer.

20

The parameter "Bookmark name" identifies the name of the bookmark which is assigned to the parameter "Bookmark address" in the central server computer, which parameter identifies the location of the document to be printed by the URL pointing to the internet page as the document, while the parameter "Appliance ID" identifies the appliance to which the document is to be applied. In the case of printing a document, the "Appliance ID" will be the printer name of a selected printer.

30



The mobile device 100 then sends the printing instruction message 304 to the central server computer 106 via the PSTN 104, gateway 102, and the internet 108. After receiving such an instruction message 304 in the central server computer 106, the content of the instruction message 304 is stored in the central server computer 106.

Using the parameter "Bookmark name" in the instruction message 304, the central server computer 106 determines the corresponding bookmark address according to the stored central bookmark list 204.

In a predetermined periodic time interval, the appliance server 116 polls stored instruction messages 304 and the determined bookmark addresses from the central server computer 106.

After having downloaded the at least one instruction message 304 and the determined bookmark addresses, the appliance server 116 starts a browser program 201, preferably an internet browser program (World Wide Web browser program, WWW browser program), e.g. the Netscape<sup>TM</sup> Communicator<sup>TM</sup> browser program or the Internet Explorer<sup>TM</sup>, which is installed in the appliance server 116.

Using the respective bookmark address, i.e. the URL of the bookmark name in the respective instruction message 304, the appliance server 116 connects to the respective internet site 306 (reference number 305 in **Fig.3**) being addressed by the URL and downloads the addressed HTML page 306.

When the web page 306 had been downloaded by the appliance server 116, the appliance server 116 converts the web page 306 into the respective format of the appliance which is denoted by the ApplianceID, in other words into the desired output format of the output appliance.

The appliances such as the printer 118, a fax machine 120, and a projector 122 are connected to the appliance server 116. The appliance server 116 has been installed with all the necessary applications and drivers of those connected appliances, in particular, printer drivers of the connected printers.

5

The appliance server 116 thus converts the document to a format suitable for the designated appliance. In the present embodiment, the document is converted to a print job in a **Page Descriptive Language** (PDL) format. According to the printing instruction, the print job 307 is passed to the designated printer 118 identified by the ApplianceID, e.g., the printer name. A  
10 hard copy of the document will be then generated.

Alternatively, the user can apply the document to other appliances such as the fax machine 120 or the projector 122. The user needs to designate the  
15 appliance in the instructions being sent to the central server computer 106 by incorporating the appliance identity into the instructions. Accordingly, the appliance server 116 converts the retrieved document to a format suitable for the designated appliance and further passes it to the appliance.

20 Further alternatives can be made to the above-described embodiments. For example, the appliances can also be connected to the central server computer 106 directly, in which case the central server computer 106 also acts as an appliance server 116.

25 According to the embodiment of the invention, the user of the mobile device 100 can now apply information downloaded from internet to an appliance using the bookmarks.

Additionally, other mobile devices such as personal digital assistants can be  
30 used on condition that they are able to communicate with the gateway 102.

In the following, some general aspects of the invention and further alternative embodiments are illustrated.

5 In an alternative embodiment of the invention, a plurality of appliances is registered in the first computer system. The plurality of appliances can be connected to the first computer system via a second communication network. The mobile device designates a first appliance from the plurality of appliances by specifying it in the instructions.

10 Furthermore, the first network includes a gateway with which the mobile device communicates by using standard telecommunication protocols. The gateway converts the instructions to a format which the first computer system understands. Preferably, the instructions are converted to a format suitable for transfer through the internet, e.g. the HTML format or the WML format.

15 The first appliance can be a printer, a fax machine, or a projector. In one embodiment, the first appliance is a printer and the first computer system converts the information to a print job in a format suitable for printing.

20 According to another aspect of the invention, a computer system has an interface for receiving instructions from the mobile device via a first communication network. The instructions designate information to be processed and the appliance to which the designated information is to be applied. The appliance is connected to the computer system. The computer  
25 system has a sub-system for processing the instructions and retrieving the designated information. The sub-system further applies the information to the appliance.

The mobile device may designate the information by incorporating the location  
30 thereof into the instructions such that the computer system is capable of retrieving the information.

In this embodiment, the sub-system may convert the information to a format suitable for the appliance.

In this context, it should be mentioned that the invention also may be  
5 implemented in a scenario without any firewalls or gateways, especially in a scenario of a local area network the mobile device is connected to.

Furthermore, it should be mentioned, that usually, the bookmarks is not used for internet surfing, but usually for printing purposes. The reason for this is  
10 mainly that usually a document being encoded according to the HTML may not be viewed on a WAP (**W**ireless **A**pplication **P**rotocol) mobile device 100.

According to an alternative embodiment of the invention, network path bookmark information being encoded according to the WML standard (**W**ireless  
15 **M**arkup **L**anguage) is provided for synchronization. In this context, the bookmark information may also be used for surfing purposes.

According to a further embodiment of the invention, the mobile device transmits a request for a network path bookmark information to the server computer. The  
20 server computer then determines whether the requested network path bookmark information is already stored in the server computer. In case that the requested network path bookmark information is not stored in the server computer, the server computer transmits a request for the network path bookmark information to the client computer, and the client computer transmits  
25 the requested network path bookmark information to the server computer. In case that the network path bookmark information is stored in the server computer, the server computer transmits the requested network path bookmark information to the mobile device.

30 According to a further alternative embodiment of the invention, the user sends an email to the server or fills in an electric form before he leaves his personal computer. In this case, it is even not necessary to have a web browser

application being installed in the client computer, i.e. the user's personal computer. The central server computer may be updated manually with the correct URLs.

5 According to this alternative embodiment of the invention, a user can update the central server computer with any bookmark which he might access and printing a document being addressed by a bookmark by performing the following steps, for example:

- 10 1. The user updates the central server computer using an email or using web pages.
2. The user of the mobile device selects a bookmark name and transmits the bookmark name to the central server computer using the mobile device.
3. The central server computer surfs, i.e. connects to the web page being addressed by the bookmark address corresponding to the selected  
15 bookmark name, and gets the respective web page rendered.
4. In a last step, the central server computer transmits the rendered web page to a printer, generally the selected appliance, which is connected to the central server computer.

**What is claimed is:**

1. A method for supplying at least one network path bookmark information to a mobile device, the network path bookmark information being stored in a client computer, wherein
  - a) the client computer determines the network path bookmark information,
  - b) the client computer transmits the network path bookmark information to a server computer via a first communication network,
  - c) the mobile device, which is connected to the server computer via a second communication network, requests the at least one network path bookmark information, and
  - d) the server computer transmits the requested network path bookmark information to the mobile device.
2. The method for supplying at least one network path bookmark information to a mobile device according to claim 1, wherein the client computer extracts the network path bookmark information from a browser application being installed in the client computer.
3. The method for supplying at least one network path bookmark information to a mobile device according to claim 2, wherein the client computer extracts the network bookmark information from a predetermined directory of the client computer, in which the browser application stores its network path bookmark information.
4. The method for supplying at least one network path bookmark information to a mobile device according to claim 2, wherein the browser application is a internet browser application programme.
5. The method for supplying at least one network path bookmark information to a mobile device according to claim 1,

- wherein the mobile device transmits a request for the network path bookmark information to the server computer, and
- wherein the server computer sends a request for the requested network path bookmark information to the client computer.

5

6. The method for supplying at least one network path bookmark information to a mobile device according to claim 1,

- wherein the mobile device transmits a request for a network path bookmark information to the server computer,
- 10 - wherein the server computer determines whether the requested network path bookmark information is already stored in the server computer,
- wherein, in case that the requested network path bookmark information is not stored in the server computer, the server computer transmits a request for the network path bookmark information to the client computer,
- 15 and the client computer transmits the requested network path bookmark information to the server computer, and
- wherein, in case that the network path bookmark information is stored in the server computer, the server computer transmits the requested network path bookmark information to the mobile device.

20

7. The method for supplying at least one network path bookmark information to a mobile device according to claim 1,

wherein the network path bookmark information is encoded according to the HTML format or according to the WML format.

25

8. The method for supplying at least one network path bookmark information to a mobile device according to claim 1,

wherein the client computer determines the network path bookmark information from a predetermined directory in the client computer.

30

9. A method for supplying remotely stored information to an appliance via a mobile device, the appliance being connected to a first computer system, the method comprising the following steps:

- determining at least one network path bookmark information designating a remotely stored information to be processed, wherein the determination of the network path bookmark information comprises the following steps:
  - a) the client computer determines the network path bookmark information,
  - b) the client computer transmits the network path bookmark information to a server computer via a first communication network,
  - c) the mobile device, which is connected to the server computer via a second communication network, requests the at least one network path bookmark information, and
  - d) the server computer transmits the requested network path bookmark information to the mobile device,
- designating the determined network path bookmark information of the remotely stored information to be processed and the appliance to which the information, which is connected to the network path bookmark information, is to be applied as instructions in the mobile device,
- transmitting the instructions from the mobile device to the first computer system via a first communication network,
- retrieving the information and converting the information to a format suitable for the appliance, and
- supplying the information to the appliance for processing according to the instructions.

10. The method for supplying remotely stored information to an appliance via a mobile device according to claim 9,

wherein the client computer determines the network path bookmark information from a predetermined directory in the client computer.



11. The method for supplying remotely stored information to an appliance via a mobile device according to claim 9,  
wherein the client computer extracts the network path bookmark information from a browser application being installed in the client computer.

5

12. The method for supplying remotely stored information to an appliance via a mobile device according to claim 11,

- wherein the instructions are transmitted from the mobile device to a central server computer,
- 10 - wherein the instructions are transmitted from the mobile device to an appliance server computer,
- wherein the appliance server computer retrieves the information using the network path bookmark information and converts the information to a format suitable for the appliance, and
- 15 - wherein the appliance server computer applies the information to the appliance for processing according to the instructions.

13. The method for supplying remotely stored information to an appliance via a mobile device according to claim 9,

- 20 wherein a plurality of appliances are connected to the first computer system, the mobile device further designating the appliance among said plurality of appliances in the instructions.

14. The method for supplying remotely stored information to an appliance via a  
25 mobile device according to claim 13,  
wherein said plurality of appliances are registered in the first computer system.

15. The method for supplying remotely stored information to an appliance via a mobile device according to claim 13,

- 30 wherein the mobile device designates the appliance by specifying the client's identity in the instructions.

16. The method for supplying remotely stored information to an appliance via a mobile device according to claim 13,  
wherein the first network includes a gateway with which the mobile device communicates by using standard telecommunication protocols, and the  
5 gateway converts the instructions to a format which the first computer system understands.

17. The method for supplying remotely stored information to an appliance via a mobile device according to claim 13,  
10 wherein the information is stored in a second computer from which the first computer system retrieves the information according to the instructions.

18. The method for supplying remotely stored information to an appliance via a mobile device according to claim 13,  
15 wherein the appliance is a printer, and the first computer system converts the information to a print job in a format suitable for printing.

19. The method for supplying remotely stored information to an appliance via a mobile device according to claim 18,  
20 wherein the first computer system converts the information to a PDL format for printing.

20. A computer system which allows a user of a mobile device to retrieve at least one network path bookmark information, the network path bookmark  
25 information being stored in a client computer, the computer system comprising:  
- a client computer having stored at least one network path bookmark information being stored in a predetermined directory in the client computer, and comprising means for determining the requested network path bookmark information from the predetermined directory,  
30 - a server computer being connected to the client computer via a first communication network, the server computer being adapted to receive

the extracted network path bookmark information from the client computer,

- the mobile device, being connected to the server computer via a second communication network and being adapted to request network path bookmark information from the server computer.

5

**ABSTRACT****METHOD AND APPARATUS FOR SUPPLYING NETWORK PATH  
BOOKMARK INFORMATION REMOTELY TO A MOBILE DEVICE**

5

A method and apparatus for supplying information stored remotely to an appliance via a mobile device are provided. A client computer extracts the network path bookmark information from a predetermined directory in the client computer, and transmits the network path bookmark information to a server  
10 computer via a first communication network. The mobile device, which is connected to the server computer via a second communication network, requests the at least one network path bookmark information, and the server computer transmits the requests network path bookmark information to the mobile device. The mobile device then initiates the process by sending  
15 instructions to a computer system via a network. The instructions designate information to be processed using at least one bookmark as well as the appliance to which the information is to be applied. According to the instructions, the information is retrieved and converted to a document format suitable for the appliance. The computer system then applies the document to  
20 the designated appliance.

Figure 1


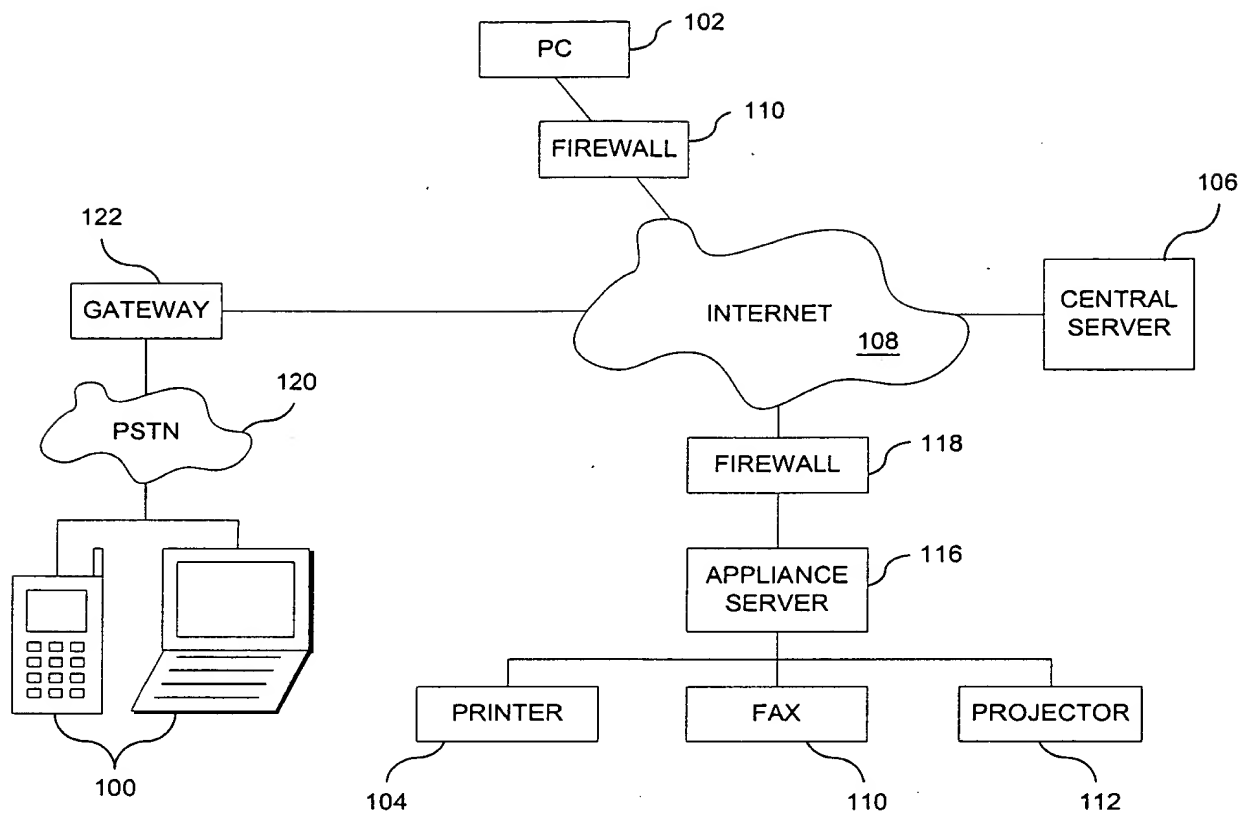


Figure 1

**Figure 2**

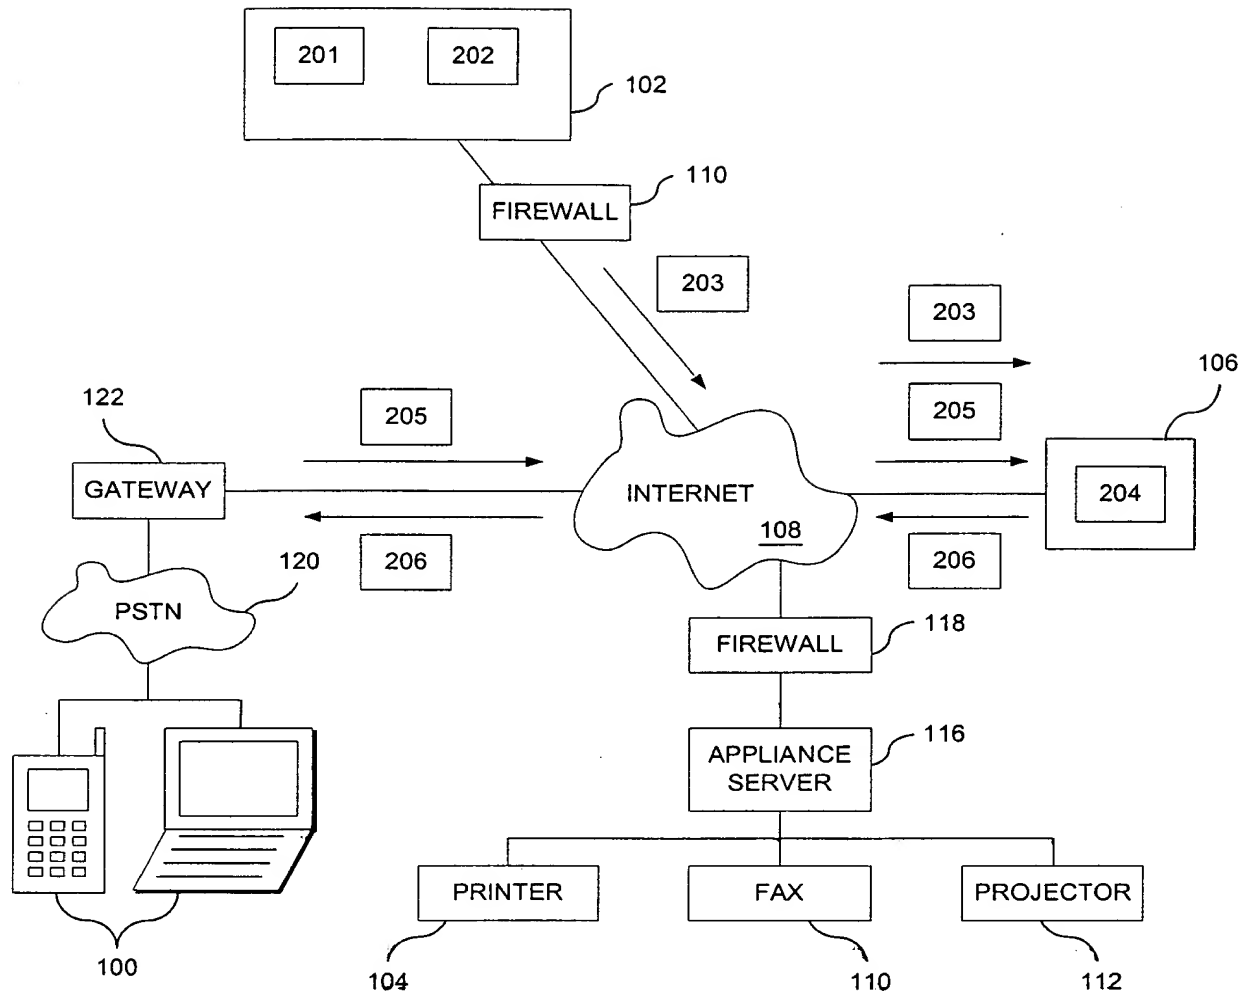